

FIG. 1

FIG. 2

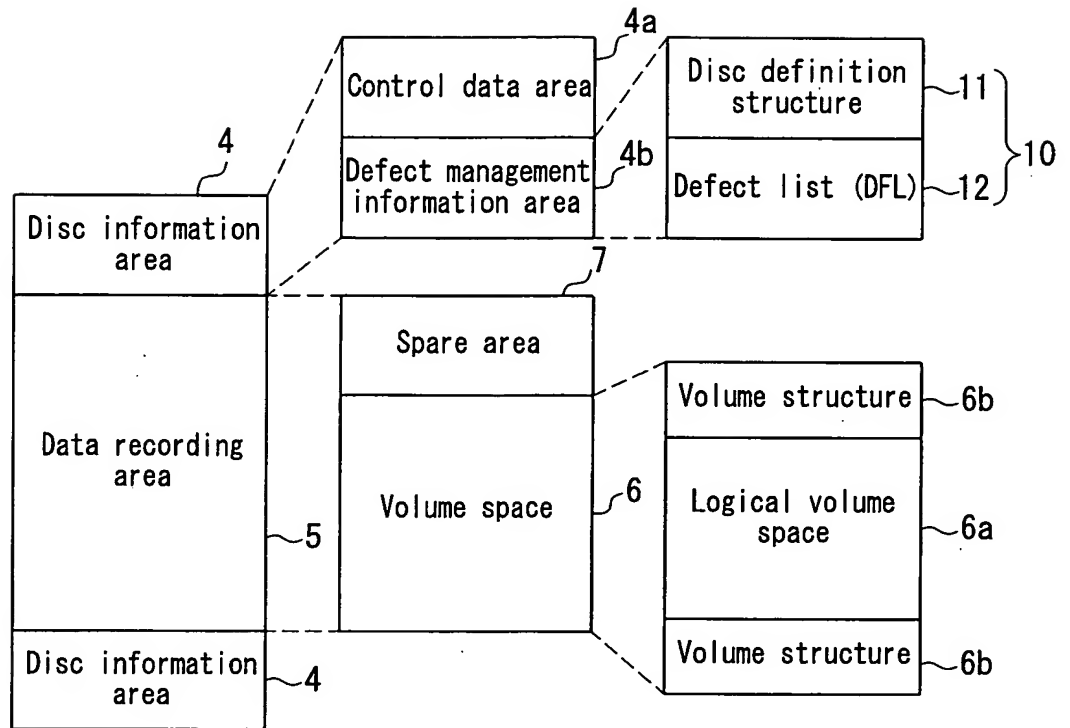


FIG. 3

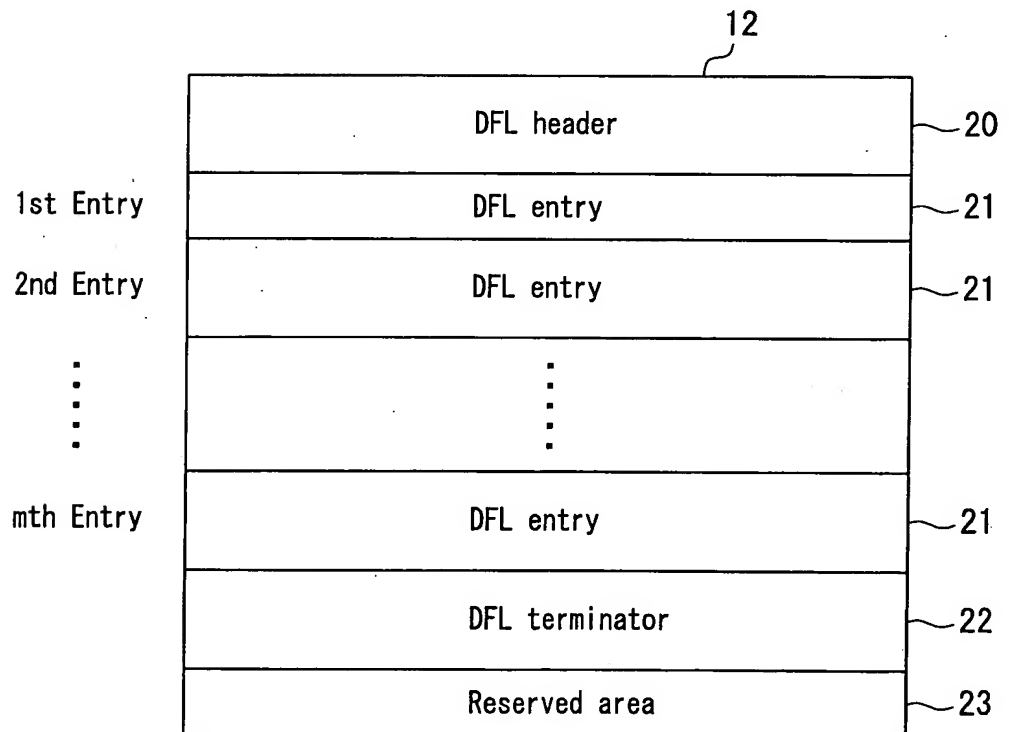


FIG. 4

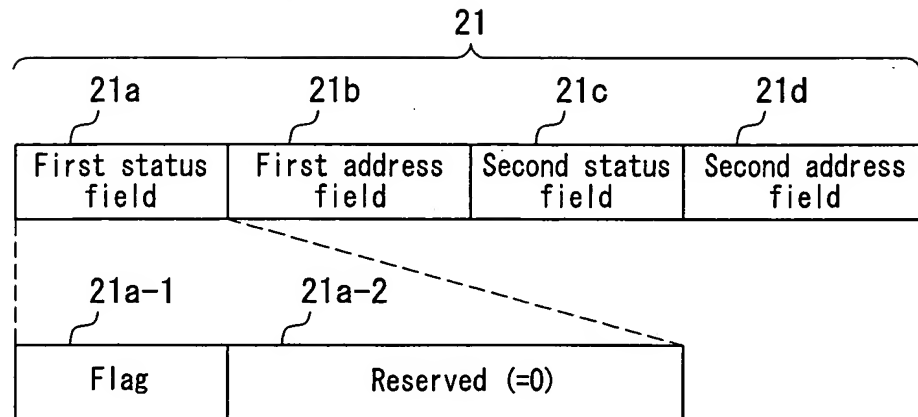


FIG. 5A

Flag	Definition
0000	A substitute cluster is allocated to a defective cluster, the data of the defective cluster is recorded in the substitute cluster
1000	A substitute cluster is allocated to a defective cluster, but the data of the defective cluster is not recorded in the substitute cluster
0001	No substitute clusters are allocated to defective clusters
0010	Invalidated DFL entry (the second address field shows locations that can be used as substitutes)
:	:
Other	(Undefined)

FIG. 5B

Flag	Definition
0000	Second status field unused
1000	Defective clusters have been physically reformatted
Other	(Undefined)

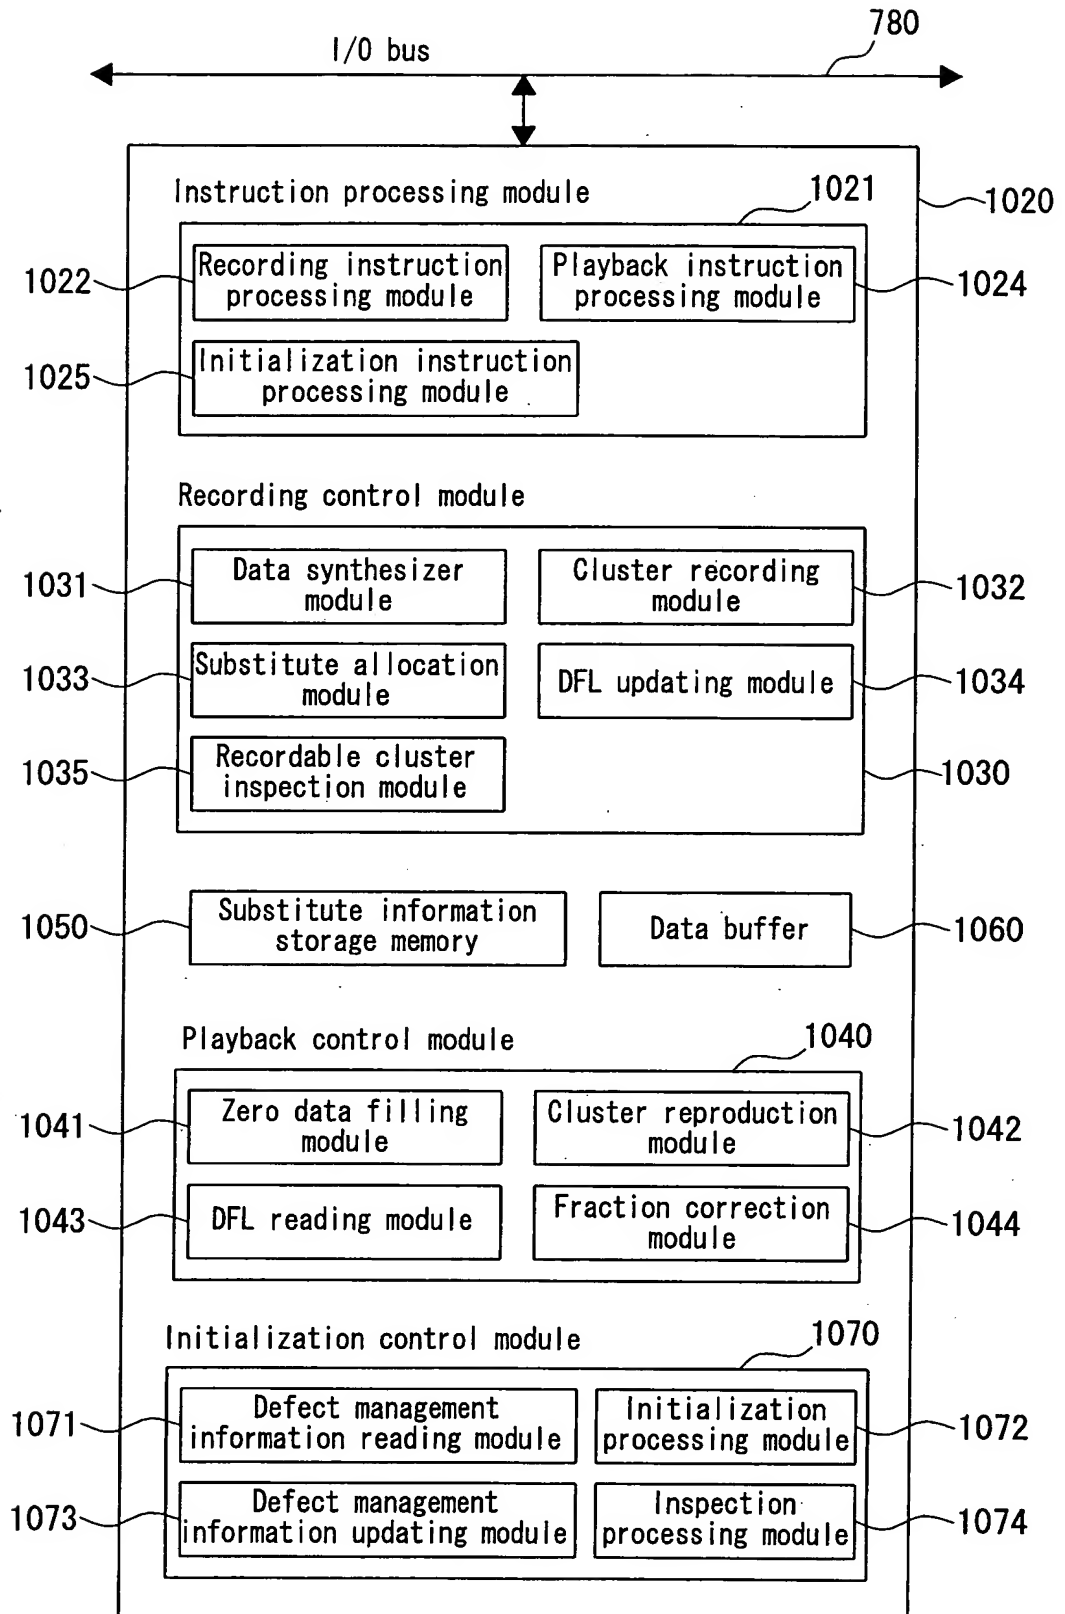


FIG. 6

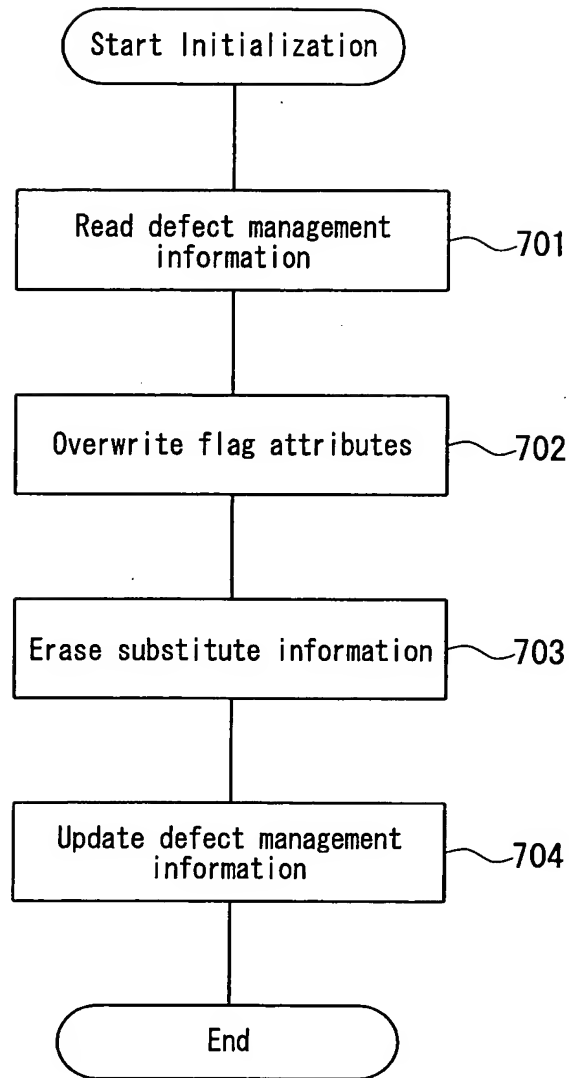


FIG. 7

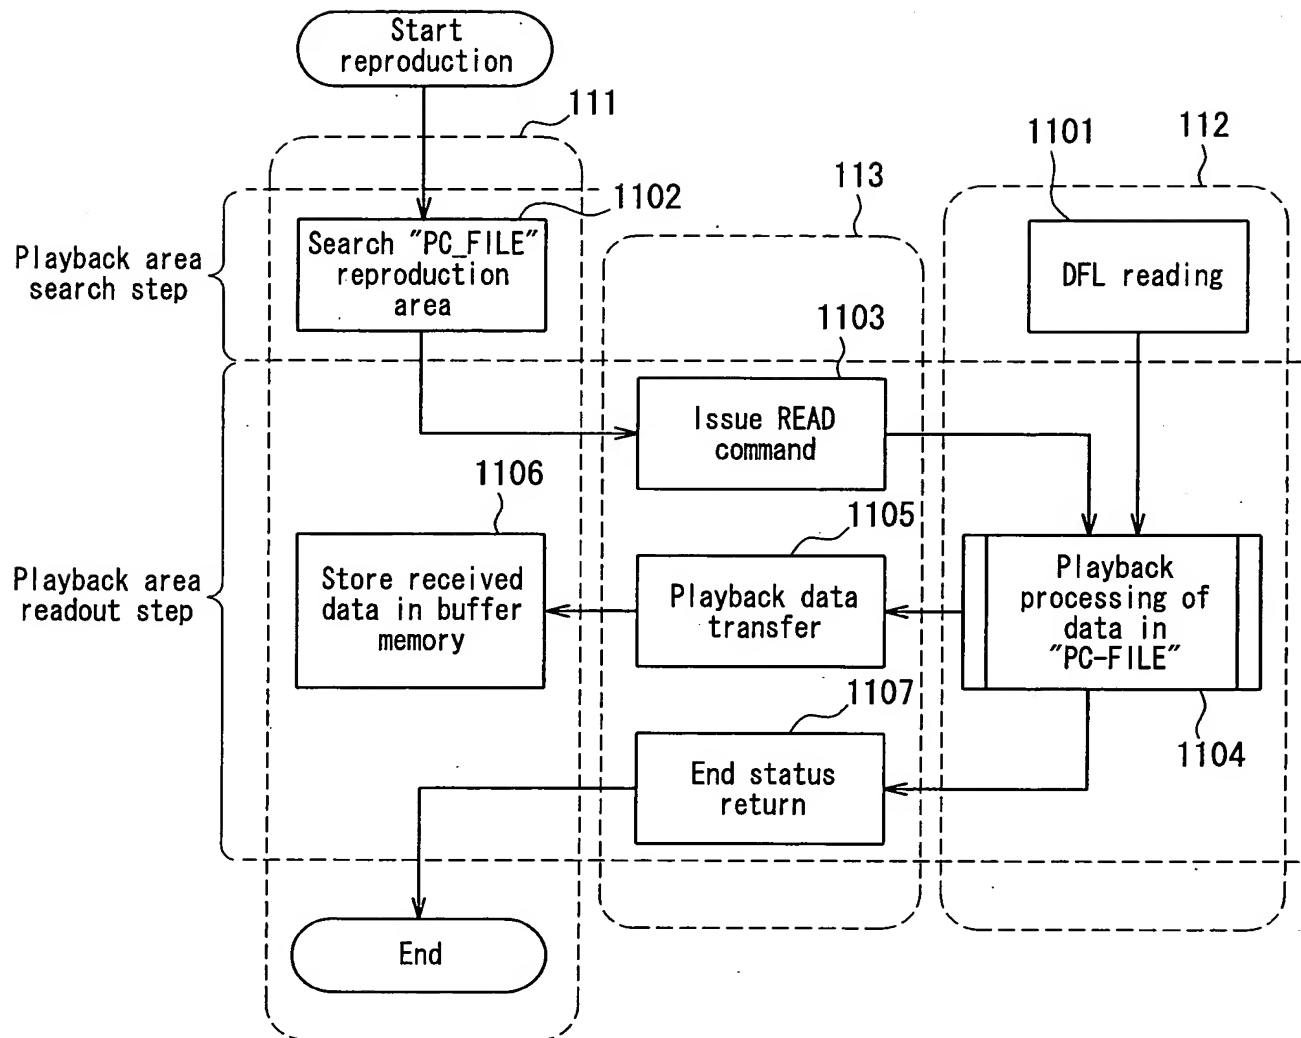


FIG. 8

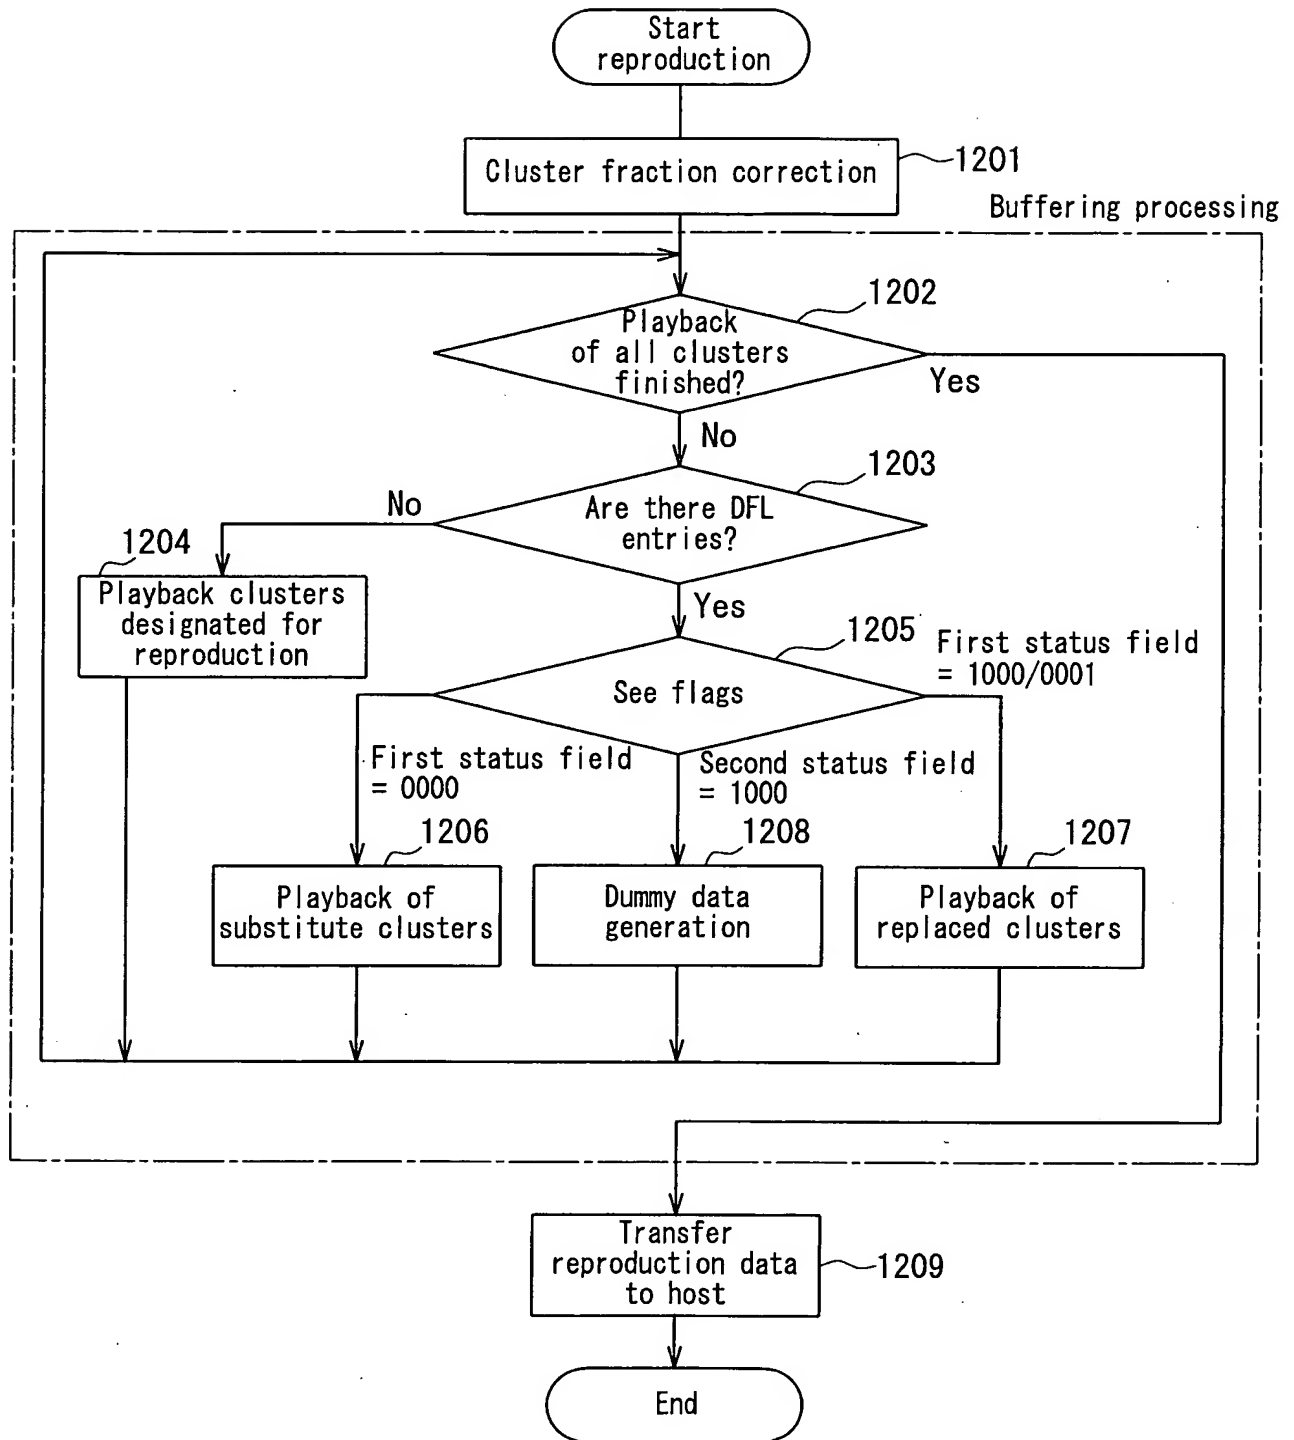


FIG. 9

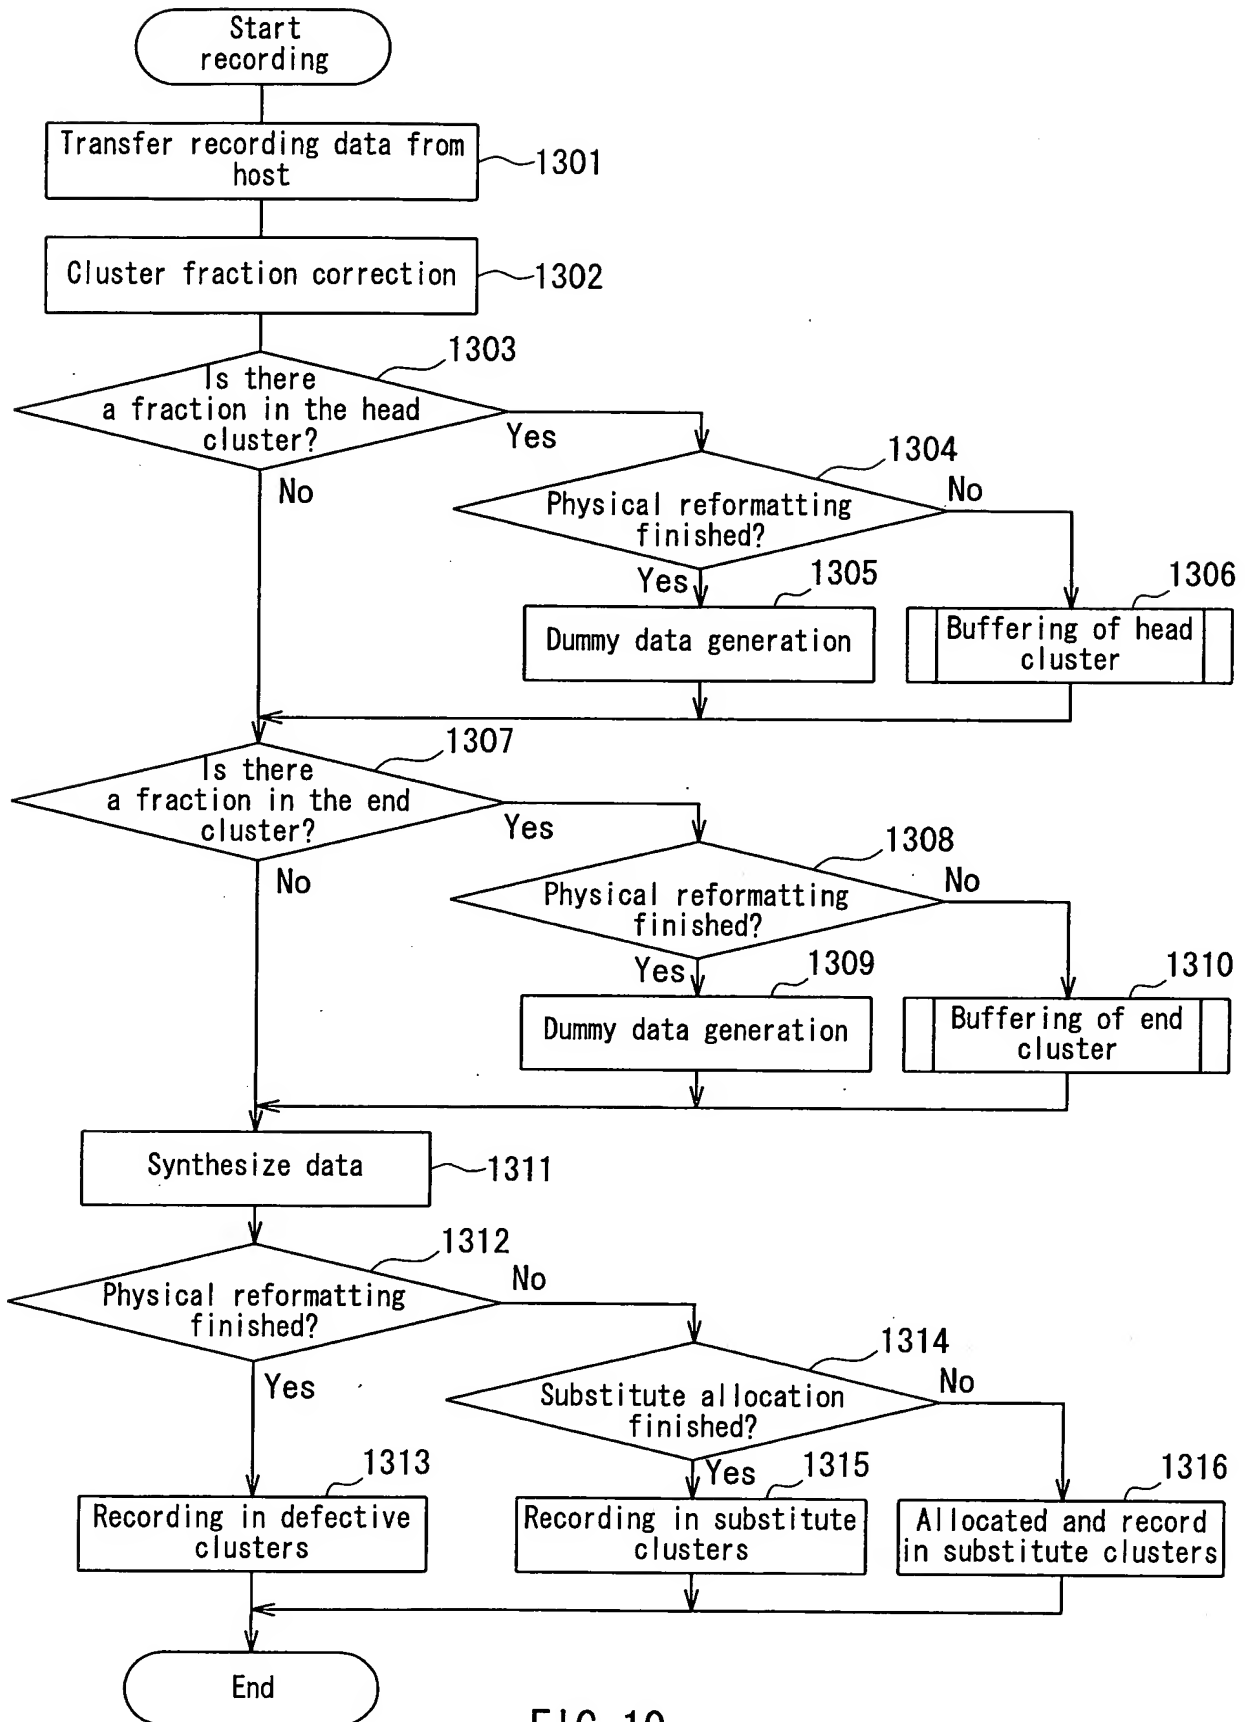


FIG. 10



FIG. 11

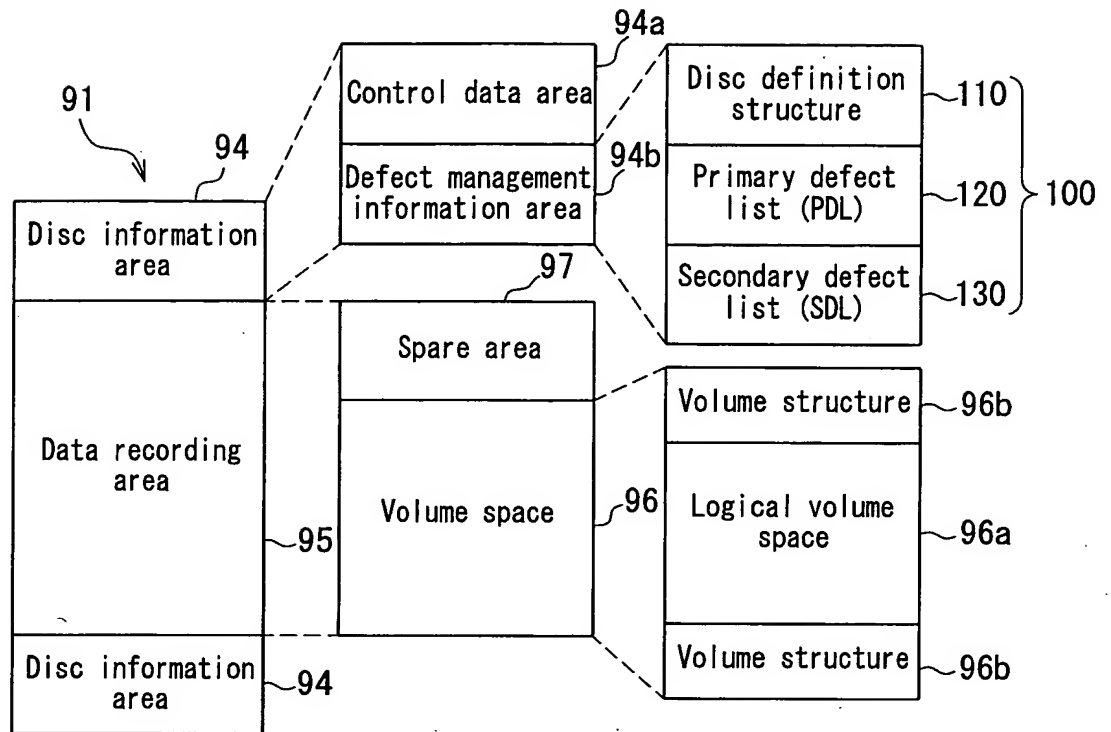


FIG. 12

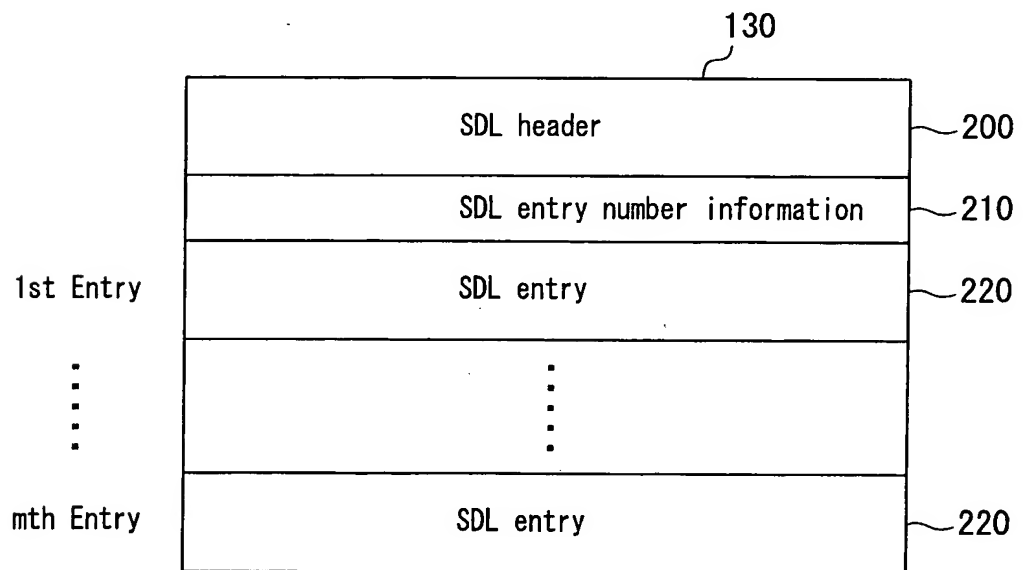


FIG. 13

